


Manual controller

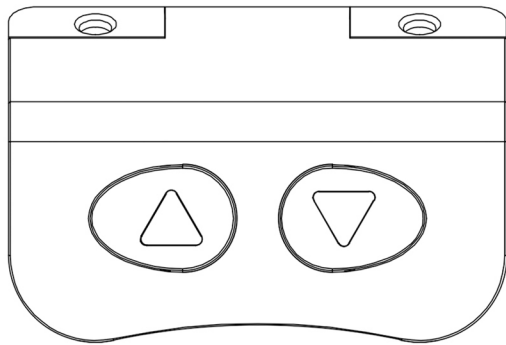

1. Reset (Initialization)


Press and hold the "V" key for a long time until the workbench moves to the lowest position, then press for 5 seconds until the workbench moves upward by 5 millimeters, indicating that it has been successfully reset.

2. Lifting and lowering exercises

Press and hold the "^" key to raise the platform or press and hold the "V" key to lower it to the desired height. Release the key to stop!

Product parameters

Rated Load 800N	Max. load 1000N	Rated load speed 16±10%mm/s
Stroke 230±10mm	Installation distance 730±10mm	Noise ≤50dB
Duty cycle Max.10%,max 2min 18/min		IP grade IP42
Packing info One set two carton(Without a mirror) (1/2)930x790x200mm G.W: 31.5KG (2/2)840x590x220mm G.W: 14.6KG		Product material Cold rolled steel Acrylic

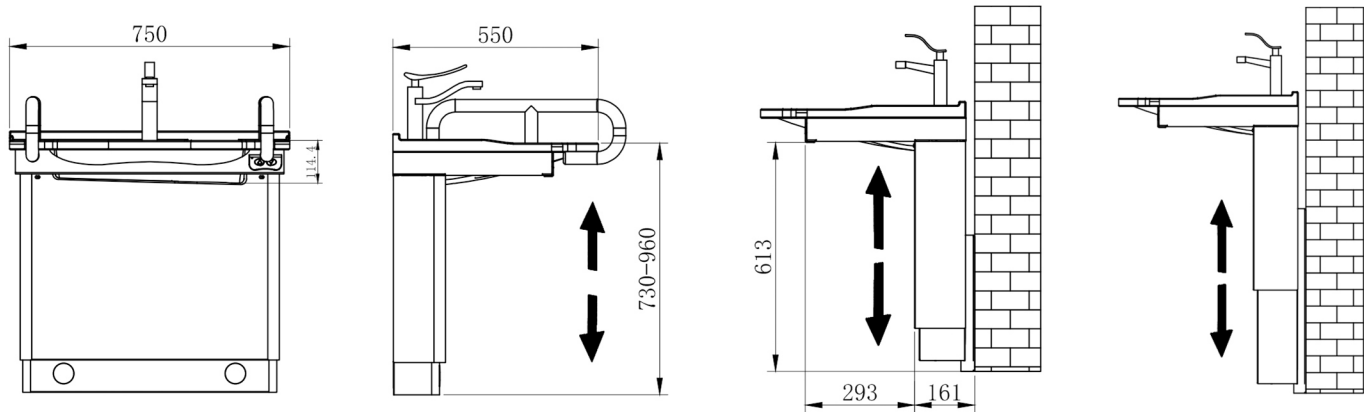


HEIGHT ADJUSTABLE WASHBASIN

{User Manual}



Height Adjustable Washbasin

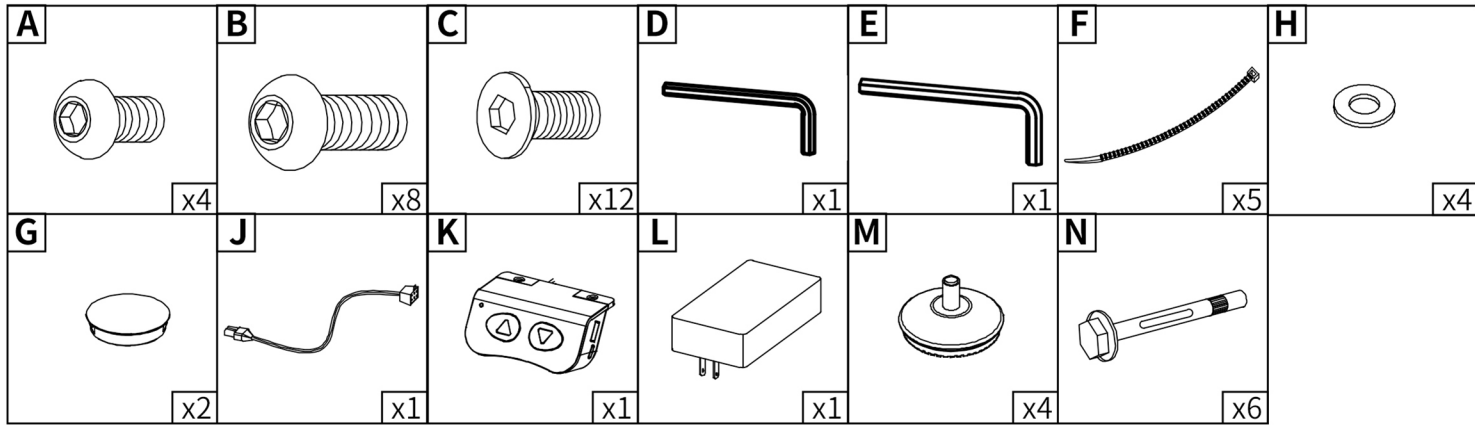

- A**

Screw M6x10
- B**

Screw M6x16
- C**

Screw M6x16
- D**

Hexagonal wrench 4mm
- E**

Hexagonal wrench 6mm
- F**

Cable binding tape
- H**

Silicone gasket
- G**

Hole plug(Ø50)
- J**

Extension line
- K**

Manual controller
- L**

Power supply
- M**

Adjust the foot pad M
(Only for the model with a support frame)
- N**

Expansion bolt M8x100
(Wall-mounted only)

Installation steps

1

Use screws A-2 and C-2 to connect the front upper cross to the left/right bracket

2

Lock the two anchor bolts respectively with screws B-8, and then screw the 4 adjusting anchor bolts onto the anchor bolts

3

Use B-8 screws to lock the two support plates respectively. The other steps are the same as those for the base plates. After completing step 6, drill 6 12*110mm deep holes on the wall according to the holes on the pre-installed hanging plates. Then fix the pre-installed hanging plates to the wall with N-6 expansion bolts. After that, hang the installed rear frame onto the corresponding hooks and proceed to step7

4

As shown in the picture: Then, put the lower guard plate over the rear rack from the top

5

First, lock the frames prepared in Step 1 with C-8 screws at the corresponding positions at the top of the two columns respectively. Then, adjust the position of the hand controller and lock it with C-2 screws!

6

Plug the motor wire, extension cord and power cord into the hand controller

7

First, place the silicone gasket K-4 on the 4 grooved holes, then put it into the washbasin. Use the flat-head screws (provided on the handrail) to pass through the side bracket, the silicone gasket (H), and the corresponding holes on the washbasin to lock the handrail! (Note: The back of the washbasin should be flush with the rear end face of the side support.) Finally, install the water supply and drainage (faucet, cold and hot water pipes, and sewer and downspout pipes).

8

First, lock the grooves on both sides of the hook side bracket on the upper guard plate with screws A-2, and finally plug the holes with G-2